


THE

# TALLMAX<sup>M</sup> PLUS<sup>+</sup>

FRAMED 72-CELL MODULE (1500V)

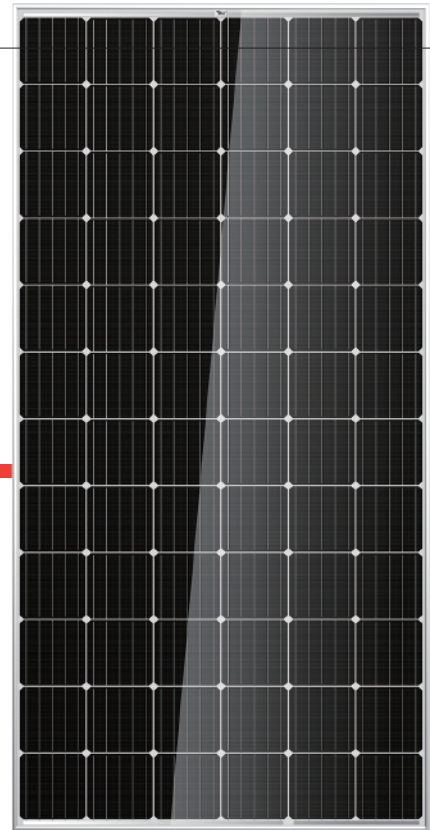

**72 CELL**  
MONOCRYSTALLINE MODULE

**335-365W**  
POWER OUTPUT RANGE


**18.8%**  
MAXIMUM EFFICIENCY

**0~+5W**  
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

## Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716  
ISO 9001: Quality Management System  
ISO 14001: Environmental Management System  
ISO14064: Greenhouse gases Emissions Verification  
OHSAS 18001: Occupation Health and Safety Management System



### Ideal for large scale installations

- Reduce BOS cost by connecting more modules in a string
- 1500V UL/1500V IEC certified



### Maximize limited space with top-end efficiency

- Up to 188 W/m<sup>2</sup> power density
- Low thermal coefficients for greater energy production at high operating temperatures



### Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- 100% EL double inspection




### Certified to withstand the most challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load


## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

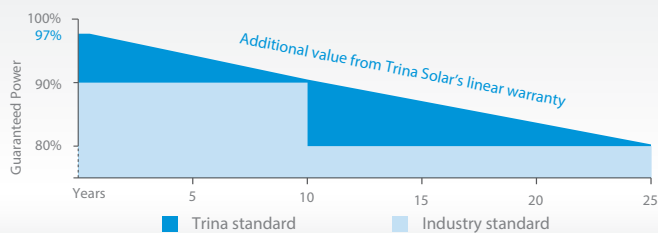


PRODUCTS TSM-DE14A(II) | POWER RANGE 335-365W

DIMENSIONS OF PV MODULE(mm)

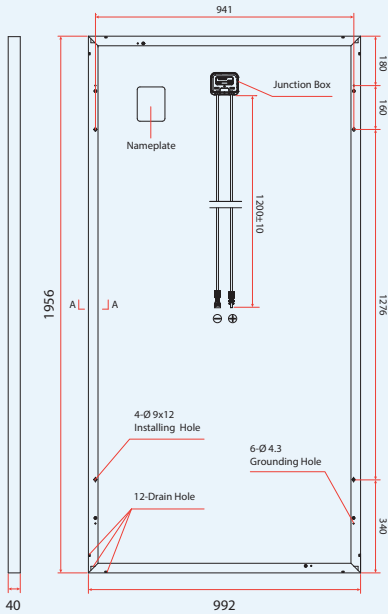


Back View




(A-A)

I-V CURVES OF PV MODULE(365W)

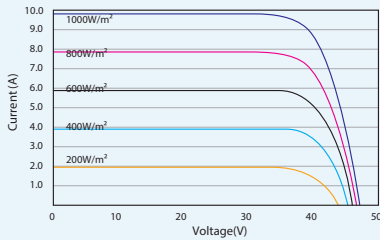

P-V CURVES OF PV MODULE(365W)

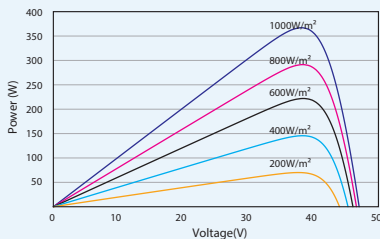

ELECTRICAL DATA (STC)

Peak Power Watts-P <sub>MAX</sub> (Wp)*	335	340	345	350	355	360	365
Power Output Tolerance-P <sub>MAX</sub> (W)	0 ~ +5						
Maximum Power Voltage-V <sub>MPP</sub> (V)	37.9	38.2	38.4	38.5	38.7	38.9	39.1
Maximum Power Current-I <sub>MPP</sub> (A)	8.84	8.90	9.00	9.09	9.17	9.26	9.35
Open Circuit Voltage-V <sub>OC</sub> (V)	46.3	46.5	46.7	46.9	47.0	47.2	47.3
Short Circuit Current-I <sub>SC</sub> (A)	9.36	9.45	9.50	9.60	9.69	9.79	9.88
Module Efficiency η <sub>p</sub> (%)	17.3	17.5	17.8	18.0	18.3	18.5	18.8

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5.  
\*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power-P <sub>MAX</sub> (Wp)	250	253	257	261	264	268	272
Maximum Power Voltage-V <sub>MPP</sub> (V)	35.1	35.2	35.5	35.6	35.8	35.9	36.1
Maximum Power Current-I <sub>MPP</sub> (A)	7.12	7.19	7.25	7.33	7.40	7.47	7.54
Open Circuit Voltage-V <sub>OC</sub> (V)	43.1	43.2	43.4	43.5	43.7	43.8	43.9
Short Circuit Current-I <sub>SC</sub> (A)	7.56	7.63	7.67	7.75	7.82	7.88	7.95

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1956 × 992 × 40 mm (77.0 × 39.1 × 1.57 inches)
Weight	26.0 kg (57.3 lb) with 4.0 mm glass; 22.5 kg (49.6 lb) with 3.2 mm glass
Glass	4.0 mm (0.16 inches) for PERC Mono; 3.2 mm (0.13 inches) for Std Mono, High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), 1200 mm (47.2 inches)
Connector	QC4 / TS4 (1500V)

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.39%/°C
Temperature Coefficient of V <sub>OC</sub>	-0.29%/°C
Temperature Coefficient of I <sub>SC</sub>	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	15A

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 27 pieces
Modules per 40' container: 648 pieces