



BAI-AT for Accuracy International AT Chassis

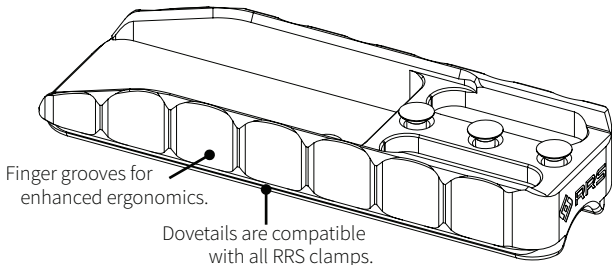

 Removable **stop screws*** ensure non-slip mounting during heavy recoil. Mount in any of five positions.

Three sockets on bottom of plate: 1/4"-20, 3/8"-16, and Quick-Detach Flush Mount.

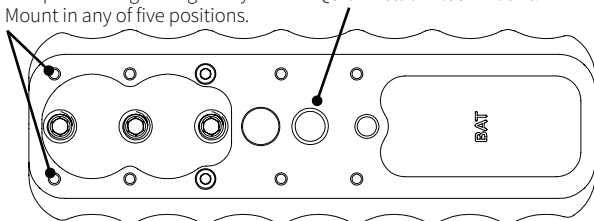

Specifications


Compatibility.....	Accuracy International chassis
Weight	4.8 oz / 136g
Material	6061-T6 black Type 3 anodized aluminum

* Position plate in clamp with stop screws **beyond front edge of clamp**. Stop screws must completely clear front edge of clamp before attempting to close the clamp. Maximum torque setting for stop screws is 10 in-lb.

INSTALLATION


1 CHECK SCREW HEIGHT

There must be sufficient clearance under the screw head to allow the screws to slide into the KeySlot during installation. Use included hex key to set the proper height if necessary.



2 INSTALL PLATE

Align mounting screws with the three rear KeySlots in the chassis. Press the plate into position, and then slide forward until the plate stops. If the plate will not slide forward go back to Step 1 (above).

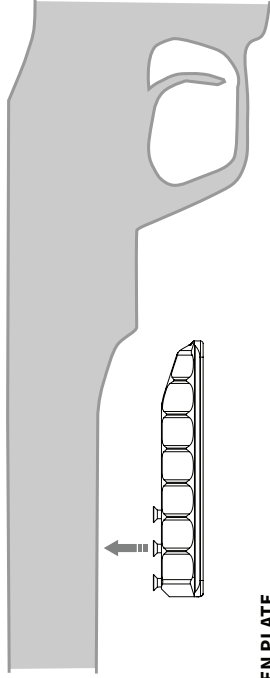

3 TIGHTEN PLATE

Tighten using inch-pound torque wrench with M4 hex bit; recommended torque setting is 35 in-lb / 4N · m.