

powered by

Q.ANTUM DUO

Q.PEAK DUO L-G5.2

380-405

ENDURING HIGH
PERFORMANCE



Q.ANTUM TECHNOLOGY: LOW LEVELISED COST OF ELECTRICITY

Higher yield per surface area, lower BOS costs, higher power classes, and an efficiency rate of up to 20.3%.



INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Anti PID Technology¹, Hot-Spot Protect and Traceable Quality Tra.Q™.



EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400 Pa) and wind loads (2400 Pa).



A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance warranty².



STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative wiring with Q.ANTUM Technology.

¹ APT test conditions according to IEC/TS 62804-1:2015, method B (-1500 V, 168 h)

² See data sheet on rear for further information.



THE IDEAL SOLUTION FOR:



Rooftop arrays on
commercial/industrial
buildings




Ground-mounted
solar power plants

Engineered in Germany

Q CELLS

MECHANICAL SPECIFICATION

| | |
|--------------|--|
| Format | 79.3in × 39.4in × 1.38in (including frame) (2015mm × 1000mm × 35mm) |
| Weight | 51.8lbs (23.5kg) |
| Front Cover | 0.13in (3.2mm) thermally pre-stressed glass with anti-reflection technology |
| Back Cover | Composite film |
| Frame | Anodized aluminum |
| Cell | 6 × 24 monocrystalline Q.ANTUM solar half cells |
| Junction Box | 2.09-3.98 × 1.26-2.36 × 0.59-0.71in (53-101 × 32-60 × 15-18mm), Protection class IP67, with bypass diodes |
| Cable | 4mm ² Solar cable; (+) ≥53.1in (1350mm), (-) ≥53.1in (1350mm) |
| Connector | Stäubli MC4, Stäubli MC4-Evo2, Amphenol UTX, Renhe 05-8, Tonglin TL-Cable01S-F, IP68 or Friends PV2e; IP67 |

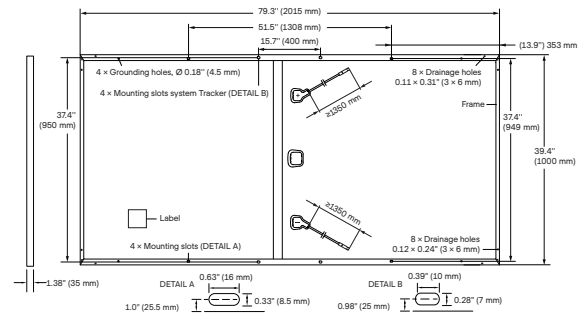


ELECTRICAL CHARACTERISTICS

| POWER CLASS | | 380 | 385 | 390 | 395 | 400 | 405 |
|---|------------------------------------|----------------------|-------|-------|-------|-------|-------|
| MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5W / -0W) | | | | | | | |
| Minimum | Power at MPP ¹ | P _{MPP} [W] | 380 | 385 | 390 | 395 | 400 |
| | Short Circuit Current ¹ | I _{SC} [A] | 10.05 | 10.10 | 10.14 | 10.19 | 10.24 |
| | Open Circuit Voltage ¹ | V _{OC} [V] | 47.95 | 48.21 | 48.48 | 48.74 | 49.00 |
| | Current at MPP | I _{MPP} [A] | 9.57 | 9.61 | 9.66 | 9.70 | 9.75 |
| | Voltage at MPP | V _{MPP} [V] | 39.71 | 40.05 | 40.38 | 40.71 | 41.04 |
| | Efficiency ¹ | η [%] | ≥18.9 | ≥19.1 | ≥19.4 | ≥19.6 | ≥19.9 |
| MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT ² | | | | | | | |
| Minimum | Power at MPP | P _{MPP} [W] | 284.4 | 288.2 | 291.9 | 295.6 | 299.4 |
| | Short Circuit Current | I _{SC} [A] | 8.10 | 8.14 | 8.17 | 8.21 | 8.25 |
| | Open Circuit Voltage | V _{OC} [V] | 45.21 | 45.46 | 45.71 | 45.96 | 46.21 |
| | Current at MPP | I _{MPP} [A] | 7.53 | 7.57 | 7.60 | 7.64 | 7.67 |
| | Voltage at MPP | V _{MPP} [V] | 37.77 | 38.08 | 38.40 | 38.71 | 39.02 |

¹Measurement tolerances P_{MPP} ±3%; I_{SC}; V_{OC} ±5% at STC: 1000 W/m², 25 ±2°C, AM 1.5G according to IEC 60904-3 • ²800 W/m², NMOT, spectrum AM 1.5G


Q CELLS PERFORMANCE WARRANTY

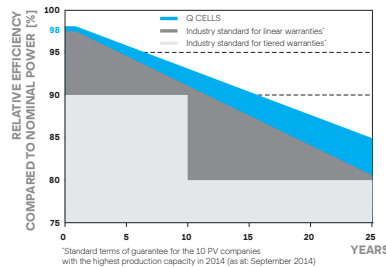

At least 98% of nominal power during first year. Thereafter max. 0.54% degradation per year. At least 93.1% of nominal power up to 10 years. At least 85% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

PERFORMANCE AT LOW IRRADIANCE

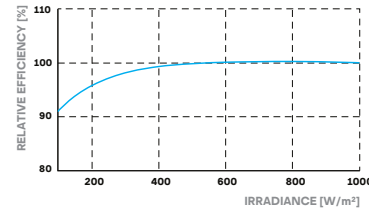

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m²)

TEMPERATURE COEFFICIENTS

| | | | | | | | |
|---|---|-------|-------|--|------|-------|----------------------|
| Temperature Coefficient of I _{SC} | α | [%/K] | +0.04 | Temperature Coefficient of V _{OC} | β | [%/K] | -0.27 |
| Temperature Coefficient of P _{MPP} | γ | [%/K] | -0.36 | Normal Module Operating Temperature | NMOT | [°F] | 109 ± 5.4 (43 ± 3°C) |

PROPERTIES FOR SYSTEM DESIGN

| | | | | |
|--|------------------------|----------------------------|---|---|
| Maximum System Voltage V _{sys} | [V] | 1500 (IEC)/1500 (UL) | Safety Class | II |
| Maximum Series Fuse Rating | [A DC] | 20 | Fire Rating | C/TYP 1 |
| Max. Design Load, Push/Pull ³ | [lbs/ft ²] | 75 (3600 Pa)/33 (1600 Pa) | Permitted Module Temperature on Continuous Duty | -40°F up to +185°F (-40°C up to +85°C) |
| Max. Test Load, Push/Pull ³ | [lbs/ft ²] | 113 (5400 Pa)/50 (2400 Pa) | | |

³See Installation Manual

QUALIFICATIONS AND CERTIFICATES

UL 1703, CE-compliant, IEC 61215:2016, IEC 61730:2016, Application Class II, U.S. Patent No. 9,893,215 (solar cells)



PACKAGING INFORMATION

| | |
|--|---|
| Number of Modules per Pallet | 29 |
| Number of Pallets per 53' Trailer | 27 |
| Number of Pallets per 40' HC-Container | 22 |
| Pallet Dimensions (L × W × H) | 81.9 × 45.3 × 46.9 in (2080 × 1150 × 1190 mm) |
| Pallet Weight | 1635 lbs (742 kg) |

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS America Inc.

400 Spectrum Center Drive, Suite 1400, Irvine, CA 92618, USA | TEL +1 949 748-5996 | EMAIL inquiry@us.q-cells.com | WEB www.q-cells.com/na