



KYOCERA SOLAR SOLUTIONS

CUTTING EDGE TECHNOLOGY

As a pioneer with four decades of experience in the development of photovoltaic systems, Kyocera drives the market as a leading provider of PV products. We demonstrate our Kaizen philosophy, or commitment to continuous improvement, by setting the industry standard in the innovation of best-in-class solar energy equipment.

QUALITY BUILT IN

- UV-stabilized, anodized aluminum frame in black
- Locking plug-in connectors provide safe, quick connections
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology with 12AWG PV wire works with transformerless inverters
- Locking plug-in connectors provide, safe quick connections

PROVEN RELIABILITY

- Kyocera modules confirmed by the Desert Knowledge Australia Solar Centre to have the highest average output of any crystalline module
- First module manufacturer in the world to pass long-term sequential testing performed by TÜV Rheinland
- Recognized as a “top performer” across all test categories by DNV GL (formerly PV Evolution Labs), an international provider of independent expert advisory and certification services, in both the 2014 and 2016 PV Module Reliability Scorecard
- This series construction was tested by TÜV Rheinland and passed IEC standards for the Ammonia and Salt Mist Corrosion Severity 1 and Severity 6 tests

CERTIFICATIONS


- UL1703 Certified and Registered
- UL Module Fire Performance: Type 2, CEC
- IEC 61215/61730
- ISO 14001, 9001 and 18001



TÜVRheinland®

60CELL 1000V

KU265-6MCA

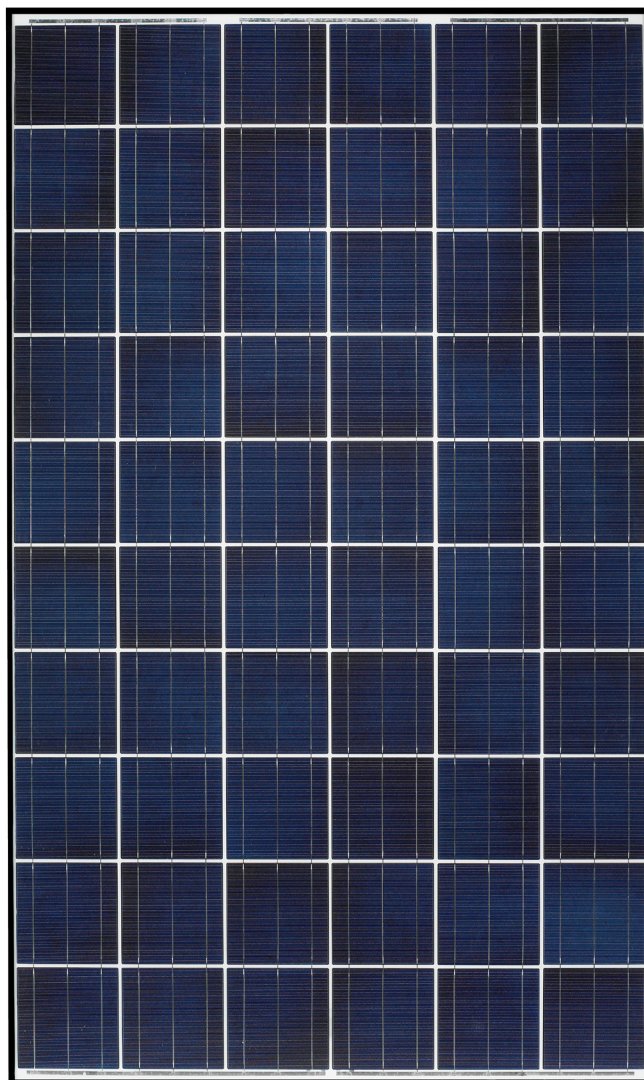

MODULE CHARACTERISTICS

Cells per module:	60 (6 x 10)
Dimensions: length/width/height	65.43in/38.98in/1.81in (1662mm/990mm/46mm)
Weight:	41.9lbs (19.0kg)

PACKAGING SPECIFICATIONS

Modules per pallet:	20
Pallets per 53' container:	36
Pallet box dimensions: length/width/height	66.00in/40.00in/47.00in (1675mm/1005mm/1175mm)
Pallet box weight:	950lbs (430kg)



WARNING: Read the instruction manual in its entirety prior to handling, installing and operating Kyocera Solar modules.

ELECTRICAL SPECIFICATIONS

Standard Test Conditions (STC)

STC=1000 W/M² irradiance, 25°C module temperature, AM 1.5 spec-

KU265-6MCA

P_{max}	265	W
V_{mp}	31.0	V
I_{mp}	8.55	A
V_{oc}	38.3	V
I_{sc}	9.26	A
$P_{tolerance}$	+5/-0	%

Nominal Operating Cell Temperature Conditions (NOCT)

NOCT=800 W/M² irradiance, 20°C ambient temperature, AM 1.5

T_{NOCT}	45	°C
P_{max}	191	W
V_{mp}	27.9	V
I_{mp}	6.85	A
V_{oc}	35.1	V
I_{sc}	7.49	A
PTC^{**}	238.1	W

Temperature Coefficients

P_{max}	-0.45	%/°C
V_{mp}	-0.48	%/°C
I_{mp}	0.02	%/°C
V_{oc}	-0.36	%/°C
I_{sc}	0.06	%/°C

Operating Temp	-40 to +90	°C
----------------	------------	----

System Design

Series Fuse Rating	15 A
--------------------	------

Maximum DC System Voltage (UL)	1000 V
--------------------------------	--------


Hailstone Impact	1in (25mm) @ 51mp (23m/s)
------------------	---------------------------

*Subject to simulator measurement uncertainty of +/- 3%.

KYOCERA reserves the right to modify these specifications without notice.

60CELL 1000V

KU265-6MCA

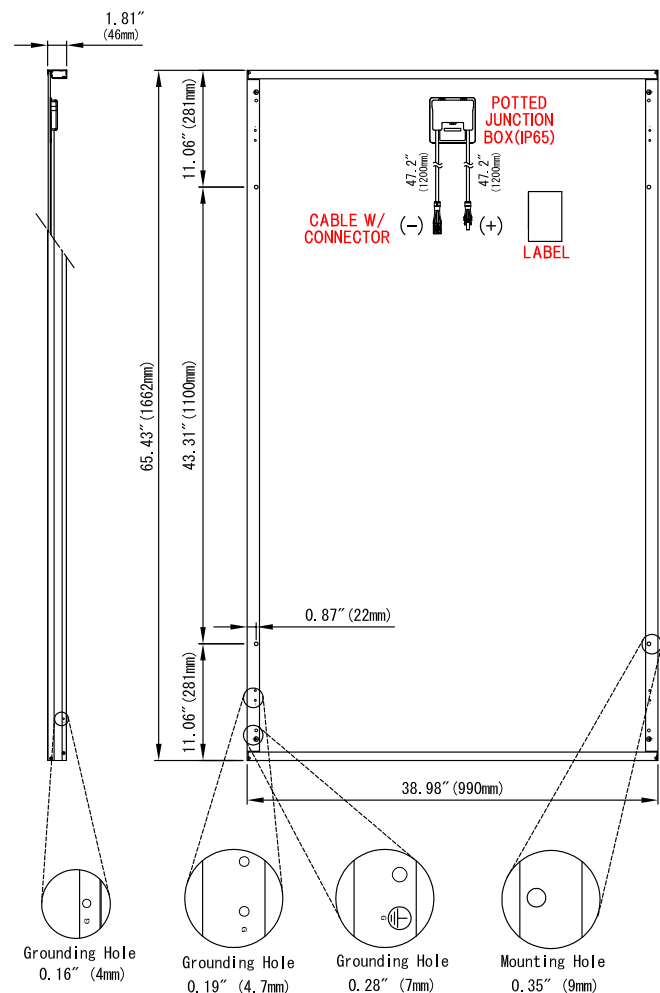

FRAME CROSS SECTION DIAGRAM

