

# CHILICON POWER CP-100

## Communication Gateway



<http://www.chiliconpower.com/resources/videos>

### CP-100™ Gateway

The Chilicon CP-100 is an easy-to-install, informative, and feature rich gateway that coordinates communications between the deployed microinverters, other smart home devices, and the cloud. The integrated 7" 800x480 pixel touch screen display plugs into any standard AC outlet and provides an ergonomic interface to the PV array and other connected appliances. In addition to monitoring production, utility panel attachment of current transducers allows the gateway to also function as a consumption monitor. The CP-100's advance control functions enable a variety of operational modes, including zero export and AC coupling for battery or microgrid connected systems.

#### Simplicity

- Connects via a standard power outlet
- Auto detect and registration of connected micros
- Ergonomic LCD touchscreen interface

#### Versatility

- Supports up to 255 micros
- Stand alone or cloud connect via WiFi or Ethernet
- Single or three phase system compliant
- Production and consumption monitoring
- zWave wireless interface
- Enables remote firmware updates


#### Reliability & Compliance

- Multi-rate, encrypted PLC
- Proprietary software immune to virus attacks
- Wide range of operation temperatures
- FCC 15 part B, CISPR 22 Class B compliant





## CP-100™ Gateway Display Screens

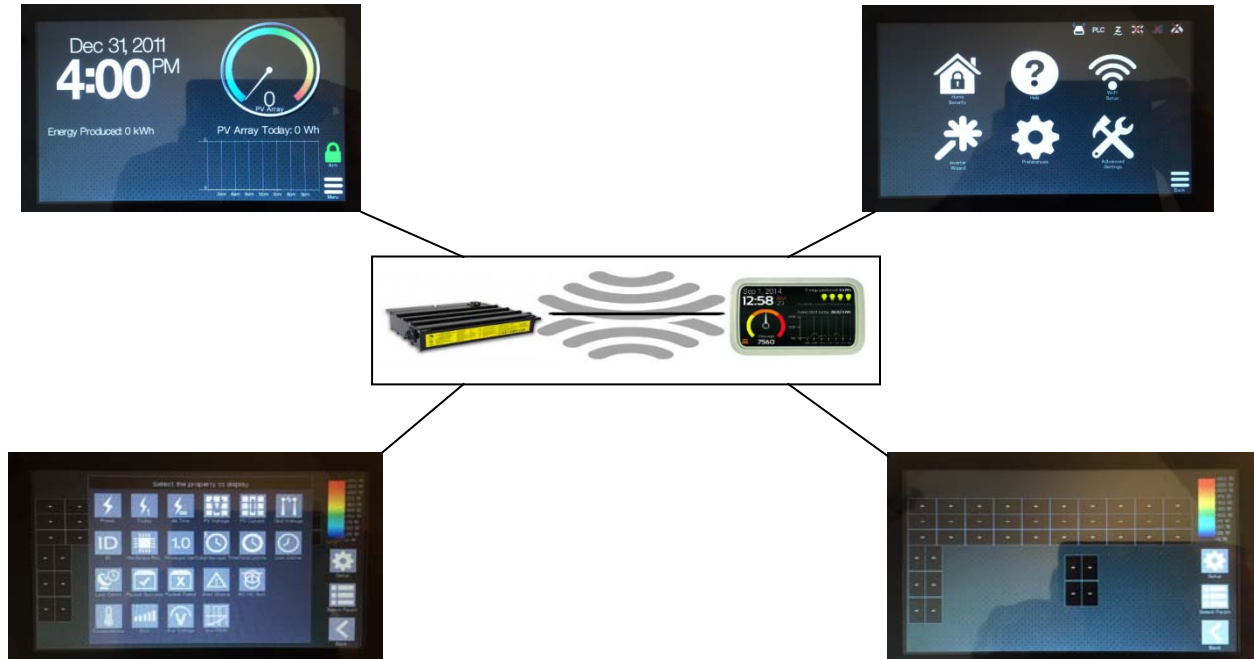

## CP-100™ Gateway Operating Specifications

### INPUT (AC)

120V single phase / 208V 3-phase L1 and N (CP-100) / or L1,L2,L3,N (CP-100-3)

### MECHANICAL DATA

Ambient temperature range -40° C to +65° C

Dimension (W x H x D) including connectors 8.5" x 6" x 1.75" (or x 0.2" if flush mount to wall)

Weight 0.63 kg (1.4 lbs)

Enclosure rating Indoor by default / Outdoor with additional NEMA 4x enclosure

### FEATURES

Communication Power line (130.2 kHz carrier), up to 255 micros\*

Monitoring Free monitoring via gateway or online software

Compliance FCC 15 Part B, CISPR 22 Class B

Accuracy\*\* +/- 2.5%

\* Additional devices require networking separate domains using Line Communication Filters (LCF).

\*\*Higher accuracy monitoring requires the use of a Revenue Grade Meter (RGM).