


1-805-528-6321 | 1-888-777-5557 www.ReallyRightStuff.com


# **CRS: CABLE RELIEF SPACER**




## SPECIFICATIONS:

Weight2.4oz/67g
Added Vertical Clearance1.25"/32mm
Material6061-T6 anodized aluminum
CRS includes one each spacer block, locking bar, 5/32" hex key,
and two thumbscrews. Additional locking bars available separately.

### TOP VIEW:

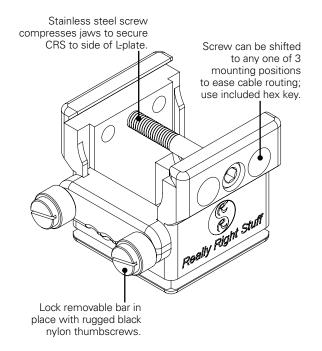

#### **BOTTOM VIEW:**



#### CABLE RELIEF SPACER IN USE


- Additional clearance is often needed when mounting camera in portrait mode (with L-plate) and shooting tethered. The CRS solves this issue and incorporates a cable lock bar to eliminate the strain on the cables.
- Cables can be routed to either side. To optimize cable routing on just one side, move the stainless steel screw to the opposite side. This will create some extra space for the cables.
- Multiple cables can be routed through the CRS on only one side or on both sides. Add an additional CRS-Bar to lock cables in place on both sides of the CRS.

#### **GUARANTEE**

ALL REALLY RIGHT STUFF BRAND PRODUCTS ARE
GUARANTEED TO THE ORIGINAL PURCHASER TO BE FREE
OF DEFECTS IN MATERIALS OR WORKMANSHIP FOR FIVE
(5) YEARS FROM THE DATE OF PURCHASE. PRODUCTS
WILL BE REPAIRED OR REPLACED AT OUR OPTION.

®, TM, © 2014 Really Right Stuff, LLC. All rights reserved.

#### INSTALL STEPS\*



\* For clarity of illustration, Lplate is not shown mounted to camera. In actual use your Lplate will be mounted to your camera. In Step 3 & Step 4, the CRS is shown on end to make it easier to illustrate how the locking bar slides into place.

