

# Q.PEAK DUO BLK-G5/SC 310-320

## Q.ANTUM SOLAR MODULE

The new **Q.PEAK DUO BLK-G5/SC** solar module from Q CELLS impresses thanks to innovative **Q.ANTUM DUO** Technology, which enables particularly high performance on a small surface, and a black Zep Compatible™ frame design for improved aesthetics, easy installation and increased safety. **Q.ANTUM**'s world-record-holding cell concept has now been combined with state-of-the-art circuitry half cells and a six-busbar design, thus achieving outstanding performance under real conditions - both with low-intensity solar radiation as well as on hot, clear summer days.



### Q.ANTUM TECHNOLOGY: LOW LEVELIZED COST OF ELECTRICITY

Higher yield per surface area, lower BOS costs, higher power classes, and an efficiency rate of up to 19.3%.



### INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior.



### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology<sup>1</sup>, Hot-Spot Protect and Traceable Quality Tra.Q™.



### EXTREME WEATHER RATING

High-tech aluminum alloy frame, certified for high snow (5400 Pa) and wind loads (4000 Pa) regarding IEC.



### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance guarantee<sup>2</sup>.



### STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative wiring with Q.ANTUM Technology.



### THE IDEAL SOLUTION FOR:




Rooftop arrays on commercial/industrial buildings

<sup>1</sup> APT test conditions according to IEC/TS 62804-1:2015, method B (-1500V, 168h)

<sup>2</sup> See data sheet on rear for further information.

## MECHANICAL SPECIFICATION

<b>Format</b>	66.3 in × 39.4 in × 1.57 in (including frame) (1685 mm × 1000 mm × 40 mm)
<b>Weight</b>	44.5 lbs (20.2 kg)
<b>Front Cover</b>	0.13 in (3.2 mm) thermally pre-stressed glass with anti-reflection technology
<b>Back Cover</b>	Composite film
<b>Frame</b>	Black anodized aluminum
<b>Cell</b>	6 × 20 monocrystalline Q.ANTUM solar half-cells
<b>Junction box</b>	2.76-3.35 in × 1.97-2.76 in × 0.51-0.83 in (70-85 mm × 50-70 mm × 13-21 mm), decentralized, IP67
<b>Cable</b>	4 mm <sup>2</sup> Solar cable; (+) ≥ 43.3 in (1100 mm), (-) ≥ 43.3 in (1100 mm)
<b>Connector</b>	Multi-Contact MC4, IP68

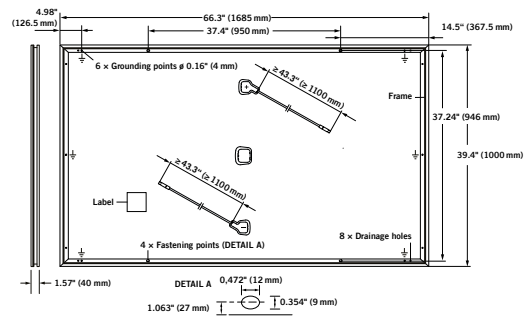

## ELECTRICAL CHARACTERISTICS

POWER CLASS		310	315	320	
<b>MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC<sup>1</sup> (POWER TOLERANCE +5W / -0W)</b>					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$ [W]	310	315	320
	Short Circuit Current <sup>*</sup>	$I_{SC}$ [A]	9.83	9.89	9.94
	Open Circuit Voltage <sup>*</sup>	$V_{OC}$ [V]	40.02	40.29	40.56
	Current at MPP <sup>*</sup>	$I_{MPP}$ [A]	9.36	9.41	9.47
	Voltage at MPP <sup>*</sup>	$V_{MPP}$ [V]	33.12	33.46	33.80
	Efficiency <sup>2</sup>	$\eta$ [%]	≥ 18.4	≥ 18.7	≥ 19.0
<b>MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOC<sup>3</sup></b>					
Minimum	Power at MPP <sup>2</sup>	$P_{MPP}$ [W]	229.7	233.5	237.2
	Short Circuit Current <sup>*</sup>	$I_{SC}$ [A]	7.93	7.97	8.02
	Open Circuit Voltage <sup>*</sup>	$V_{OC}$ [V]	37.43	37.69	37.94
	Current at MPP <sup>*</sup>	$I_{MPP}$ [A]	7.36	7.41	7.45
	Voltage at MPP <sup>*</sup>	$V_{MPP}$ [V]	31.20	31.52	31.84


<sup>1</sup>1000W/m<sup>2</sup>, 25°C, spectrum AM 1.5G

<sup>2</sup> Measurement tolerances STC ±3%; NOC ±5%

<sup>3</sup> 800W/m<sup>2</sup>, NOCT, spectrum AM 1.5G

\* typical values, actual values may differ


## Q CELLS PERFORMANCE WARRANTY

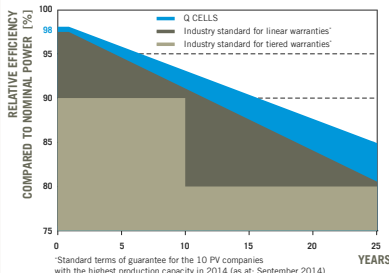

At least 98% of nominal power during first year. Thereafter max. 0.54% degradation per year. At least 93.1% of nominal power up to 10 years. At least 85% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organization of your respective country.

## PERFORMANCE AT LOW IRRADIANCE

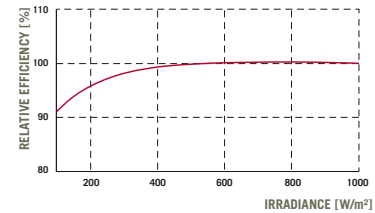

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000W/m<sup>2</sup>).

## TEMPERATURE COEFFICIENTS

Temperature Coefficient of $I_{SC}$	$\alpha$	[%/K]	+0.04	Temperature Coefficient of $V_{OC}$	$\beta$	[%/K]	-0.28
Temperature Coefficient of $P_{MPP}$	$\gamma$	[%/K]	-0.37	Normal Operating Cell Temperature	NOCT	[°F]	113 ± 5.4 (45 ± 3°C)

## PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage $V_{SYS}$	[V]	1000 (IEC) / 1000 (UL)	Safety Class	II
Maximum Series Fuse Rating	[A DC]	20	Fire Rating	C (IEC) / TYPE 1 (UL)
Design load, push (UL) <sup>2</sup>	[lbs/ft <sup>2</sup> ]	50 (2400 Pa)	Permitted module temperature on continuous duty	-40°F up to +185°F (-40°C up to +85°C)
Design load, pull (UL) <sup>2</sup>	[lbs/ft <sup>2</sup> ]	50 (2400 Pa)		<sup>2</sup> see installation manual

## QUALIFICATIONS AND CERTIFICATES

UL 1703; CE-compliant;  
IEC 61215 (Ed. 2); IEC 61730 (Ed. 1), application class A



## PACKAGING INFORMATION

Number of Modules per Pallet	26
Number of Pallets per 53' Trailer	32
Number of Pallets per 40' High Cube Container	26
Pallet Dimensions (L × W × H)	69.3 in × 45.3 in × 46.9 in (1760 mm × 1150 mm × 1190 mm)
Pallet Weight	1268 lbs (575 kg)

**NOTE:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Hanwha Q CELLS America Inc.

300 Spectrum Center Drive, Suite 1250, Irvine, CA 92618, USA | TEL +1 949 748 59 96 | EMAIL inquiry@us.q-cells.com | WEB www.q-cells.us