



# TITAN

## SOLAR PANEL

### 60 Cell Monocrystalline PV Module



CHUBB®

\* Chubb provides error and omission insurance to Silfab Solar Inc.

SIL-340 NL  
POWERED BY  
SILFAB SOLAR



#### INDUSTRY LEADING WARRANTY


The Titan Solar Panel is manufactured by Silfab Solar and includes an industry leading 25-year product workmanship and 30-year performance warranty.

#### MAXIMUM ENERGY OUTPUT

Leveraging over 35+ years of worldwide experience in the solar industry, Silfab is dedicated to superior manufacturing processes and innovations such as Bifacial and Back Contact technologies, to ensure our partners, such as Titan Solar have the latest in solar innovation.

#### NORTH AMERICAN QUALITY

Silfab is the leading automated solar module manufacturer in North America. Utilizing premium quality materials and strict quality control management to deliver the highest efficiency, premium quality PV modules 100% made in North America.

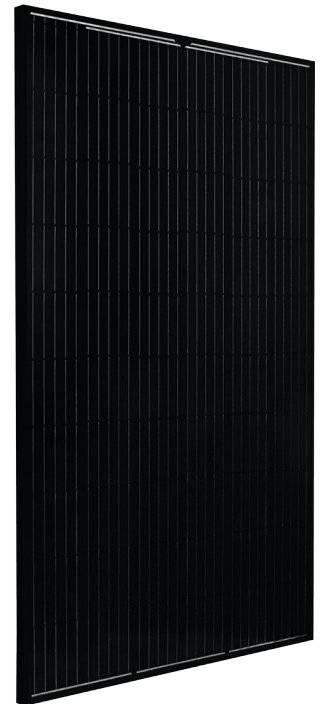

#### ■ BAA / ARRA COMPLIANT

Panels are designed and manufactured to meet Buy American Act Compliance. The US State Department, US Military and FAA have all utilized Silfab panels in their solar installations.

#### ■ LIGHT AND DURABLE

Engineered to accommodate high wind load conditions for test loads validated up to 4000Pa uplift. The light-weight frame is exclusively designed for wide-ranging racking compatibility and durability.

#### ■ QUALITY MATTERS

Total automation ensures strict quality controls during the entire manufacturing process at ISO certified facilities.

#### ■ DOMESTIC PRODUCTION

Silfab Solar manufactures PV modules in two automated locations within North America. Our 500+ North American team is ready to help Titan Solar win the hearts and minds of customers, providing customer service and product delivery that is direct, efficient and local.

#### ■ AESTHETICALLY PLEASING

All black sleek design, ideal for high-profile residential or commercial applications.

#### ■ PID RESISTANT

PID Resistant due to advanced cell technology and material selection. In accordance to IEC 62804-1.

Electrical Specifications		SIL-340 NL mono PERC	
Test Conditions		STC	NOCT
Module Power (Pmax)	W <sub>p</sub>	340	241
Maximum power voltage (V <sub>pmax</sub> )	V	33.7	30.4
Maximum power current (I <sub>pmax</sub> )	A	10.1	7.9
Open circuit voltage (V <sub>oc</sub> )	V	40.9	37.1
Short circuit current (I <sub>sc</sub> )	A	10.5	8.3
Module efficiency	%	20.0	17.7
Maximum system voltage (VDC)	V		1000
Series fuse rating	A		20
Power Tolerance	W <sub>p</sub>		+/-3%

Measurement conditions: STC 1000 W/m<sup>2</sup> • AM 1.5 • Temperature 25 °C • NOCT 800 W/m<sup>2</sup> • AM 1.5 • Measurement uncertainty ≤ 3%  
 • Sun simulator calibration reference modules from Fraunhofer Institute. Electrical characteristics may vary by ±5% and power by +/-3%.

Temperature Ratings		SIL-340 NL mono PERC	
Temperature Coefficient I <sub>sc</sub>		0.064 %/°C	
Temperature Coefficient V <sub>oc</sub>		-0.28 %/°C	
Temperature Coefficient P <sub>max</sub>		-0.36 %/°C	
NOCT (± 2°C)		46 °C	
Operating temperature		-40/+85 °C	

Mechanical Properties and Components		SIL-340 NL mono PERC	
Module weight		41 ± 0.4 lbs	
Dimensions (H x L x D)		66.9 in x 39.4 in x 1.5 in	
Maximum surface load (wind/snow)*		83.5/112.8 lb/ft <sup>2</sup>	
Hail impact resistance		ø 1 in at 51.6 mph	
Cells		60 - Si mono PERC - 5 busbar, 6.25 x 6.25 Inch	
Glass		0.126 in high transmittance, tempered, DSM anti-reflective coating	
Cables and connectors (refer to installation manual)		47.2 in, ø 0.22 in, MC4 from Staubli	
Backsheet		High durability, superior hydrolysis and UV resistance, multi-layer dielectric film, fluorine-free PV backsheet	
Frame		Anodized Aluminum (Black)	
Bypass diodes		3 diodes-30SQ045T (45V max DC blocking voltage, 30A max forward rectified current)	
Junction Box		UL 3730 Certified, IEC 62790 Certified, IP67 rated	

Warranties		SIL-340 NL mono PERC			
Module product workmanship warranty		25 years**			
Linear power performance guarantee		30 years			
		≥ 97.1% end 1 <sup>st</sup> year	≥ 91.6% end 12 <sup>th</sup> year	≥ 85.1% end 25 <sup>th</sup> year	≥ 82.6% end 30 <sup>th</sup> year

Certifications		SIL-340 NL mono PERC			
Product		ULC ORD C1703, UL1703, CEC listed***, UL 61215-1/-1-1/-2, UL 61730-1/-2, IEC 61215-1/-1-1/-2***, IEC 61730-1/-2***, CSA C22.2#61730-1/-2***, IEC 62716 Ammonia Corrosion; IEC61701:2011 Salt Mist Corrosion Certified, UL Fire Rating: Type 2			
Factory		ISO9001:2015			

- Modules Per Pallet: 26
- Pallets Per Truck: 36
- Modules Per Truck: 936

\*⚠ Warning. Read the Safety and Installation Manual for mounting specifications and before handling, installing and operating modules.

\*\*12 year extendable to 25 years subject to registration and conditions outlined under "Warranty" at [www.silfabsolar.com](http://www.silfabsolar.com).

\*\*\*September 2020 expected completion date.

PAN files generated from 3rd party performance data are available for download at: [www.silfabsolar.com/downloads](http://www.silfabsolar.com/downloads)



Titan Solar Power  
 525 W Baseline Rd  
 Mesa, AZ 85210  
 Tel 855 SAY-SOLAR  
[Titansolarpower.com](http://Titansolarpower.com)  
[info@titansolarpower](mailto:info@titansolarpower)



Silfab Solar Inc.  
 240 Courtneypark Drive East  
 Mississauga ON L5T 2Y3 Canada  
 Tel +1 905-255-2501 | Fax +1 905-696-0267  
[info@silfabsolar.com](mailto:info@silfabsolar.com) | [www.silfabsolar.com](http://www.silfabsolar.com)



Silfab Solar Inc.  
 800 Cornwall Ave  
 Bellingham WA 98225 USA  
 Tel +1 360-569-4733

